



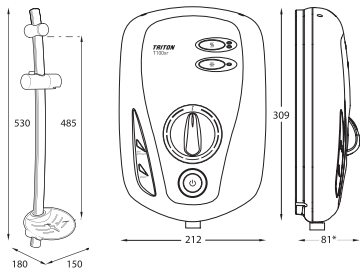

T100xr electric shower

electric showers



Dimensions given are approximate

| | |
|--|---|
| Temperature Control | Stabilised |
| Power Ratings | 8.5 kW, 9.5 kW, 10.5 kW |
| Inlet Connection | 15mm compression |
| Water Entry Points | Bottom, back (right hand side unit) |
| Cable Entry Points | Top, back (right hand side unit) |
| Outlet Connection | 1/2" BSP |
| Plumbing System | Cold water only |
| Minimum Running Pressure/Flow | 1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5 kW |
| Maximum Static Pressure | 10 Bar |
| Surface Mounted Only | |
| Approvals, Complies with BEAB, CE, BSI kite mark | |
| Guarantee | 2 years |

Instatrim available separately

Operating Features

- Push button Start/Stop with phased shutdown
- Push button power selector
- Temperature control
- Low pressure indicator
- Power on indicator
- Rub clean showerhead – 5 spray pattern

| Finish | Power | Code |
|--------------|---------|----------|
| White/Chrome | 8.5 kW | SP1008XR |
| White/Chrome | 9.5 kW | SP1009XR |
| White/Chrome | 10.5 kW | SP1001XR |