


# T80Z

## electric shower

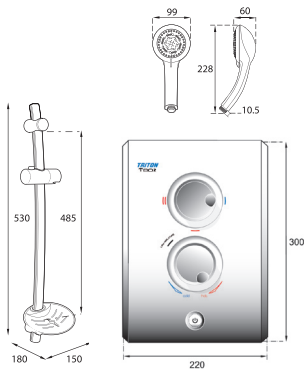

\*RHS is achieved using the Z Uni-fit Kit. Image shown is the chrome finish.

\*\*At running pressure/flow 0.7 Bar at 8 l/min (1.2 Bar at 11 l/min for 10.5kW) the shower will continue to operate at a reduced performance.

Dimensions given are approximate



Temperature Control	Stabilised
Power Ratings	7.5 kW, 8.5 kW, 9.5 kW, 10.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (left or right hand side unit*)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow for full performance	1 Bar @ 8 l/min and 1.5 Bar @ 11 l/min for 10.5kW**
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI kite mark
Guarantee	2 years

### Operating Features

- Push button Start/Stop
- Separate temperature and power controls
- Low pressure indicator
- Power on indicator
- Rub clean showerhead – 5 spray pattern

Finish	Power	Code
Chrome	8.5 kW	SP8CHR8Z
Chrome	9.5 kW	SP8CHR9Z
Chrome	10.5 kW	SP8CHR1Z
Satin/Chrome	9.5 kW	SP8SAT9Z
White/Chrome	7.5 kW	SP8007Z
White/Chrome	8.5 kW	SP8008Z
White/Chrome	9.5 kW	SP8009Z
White/Chrome	10.5 kW	SP8001Z
White/Chrome	8.5 kW	EC08008Z
White/Chrome	8.5 kW	SP8008ZUFT
Z Uni-Fit Kit	–	SPZUFT