


Elina Bar with Timed Flow Control

thermostatic mixer shower

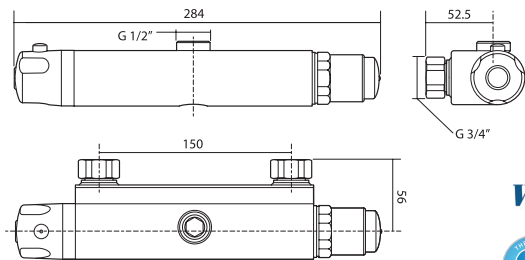

Dimensions given are approximate

WRAS
APPROVED
PRODUCT



Operating Features

- Timed flow control of 30 seconds
- Thermostatic temperature control to within 2°C
- Separate flow and temperature controls
- Automatic shutdown if hot or cold supplies fail
- Tamper proof lever controls
- Simple to install and maintain
- Factory set maximum temperature at 38°C
- Service flush temperature override setting to reduce legionella
- Flow limiters supplied

Ideal use in leisure centres

Finish	Code
Chrome	ELITFTHBM

Temperature Control	Thermostatic
Inlet Connections	1/2" BSP to 3/4" flat face union
Water Entry Points	Back
Outlet Connection	1/2" BSP top
Plumbing System Compatibility	Low and High pressure
Minimum Running Pressure/Flow	0.2 Bar @ 8 l/min or 0.1 Bar* (with a pump)
Maximum running pressure	5 Bar
Open outlet flow at 0.2 Bar	7l/min
Maximum Static Pressure	10 Bar
Pipe Inlet Centres	150mm
Maximum Flow with Flow Limiters Fitted	12l/min
Approvals, Complies with	BS EN 1111
Guarantee	3 years