



Trimix Mixing Valve

15mm and 22mm

thermostatic mixing valve

commercial

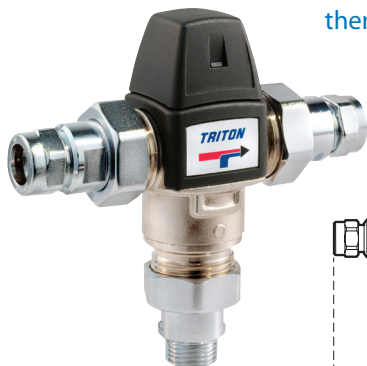

	A	B	C	D	E	F	KV	WT
Trimix 15 (15mm)	95	152	49	70	1" BSP	15	1.2	0.95
Trimix 22 (22mm)	98	154	49	70	1" BSP	22	1.2	0.95

Dimensions given are approximate

WRAS
APPROVED
PRODUCT



Temperature Control	Thermostatic
Inlet Connections	15mm or 22mm compression
Water Entry Points	Side, bottom
Water Outlet Point	Side
Outlet Connection	15mm or 22mm compression
Plumbing System Compatibility	Low and High pressure
Minimum Running Pressure/Flow	0.2 Bar at 8l/min
Maximum Static Pressure	10 Bar
Maximum running pressure	5 Bar
Surface Mounted Only	
Approvals, Complies with	TMV3
Guarantee	3 years

Operating Features

- The first TMV3 approved L-shaped thermostatic mixing valve
 - Factory set maximum temperature at 43°C
 - Thermostatic control to within 2°C
 - Tamperproof temperature adjustment setting
 - Rapid shut down
 - Check valves & filters
 - L-shaped configuration
 - Flat face union connections
 - Designed to handle operating pressure imbalances up to 10:1.
- Suitable for sinks, washbasins, bidets, showers and bath applications

Finish	Code
Chrome	TTRIMX15
Chrome	TTRIMX22