


T100E Care

thermostatic electric shower

Care

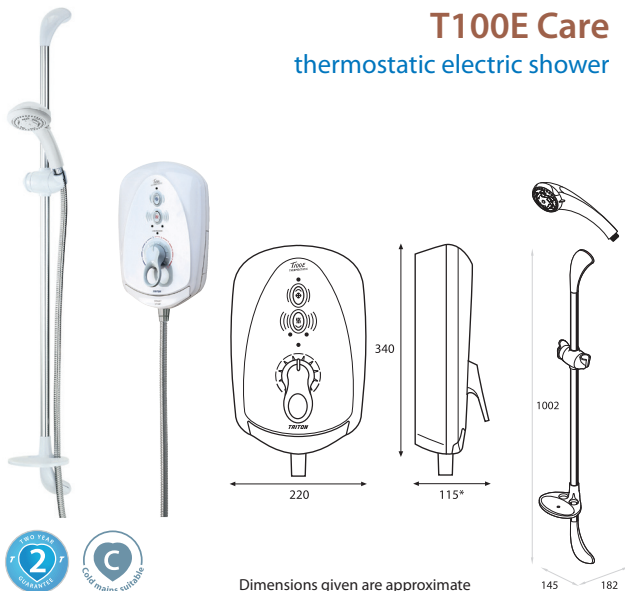

Dimensions given are approximate

Temperature Control	Thermostatic
Power Ratings	8.5 kW
Inlet Connections	15mm compression
Water Entry Points	Top, bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (right hand side of unit)
Outlet Connection	1/2" BSP
Plumbing System Compatibility	Mains cold water only
Minimum Running Pressure/Flow	1 Bar at 8l/min
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI kite mark
Guarantee	2 years

Operating Features

- Thermostatic control
- Push button Start/Stop with phased shutdown
- Push button power control
- Numbered temperature control
- Power on and low pressure indicators
- Adjustable maximum temperature
- Extended 1m riser rail
- Soft spray option

Finish	Power	Code
White/Chrome	8.5 kW	C10E084T