


# Satellites HP Mixer Unit

thermostatic mixer shower



## IMPORTANT NOTICE

In commercial premises metallic surfaces e.g. metal ceiling panels, metal ducting and metal insulating materials may block wireless transmissions from the remote control panel and prevent correct operation of the shower.

Please contact Triton's special advisory service on 0844 980 0730 for guidance on commercial installations and if necessary make the arrangements for a site survey.

A kit must be purchased with this product



Dimensions given are approximate

## Operating Features

- Versatile and easy to install
- Can be installed in a loft space, an airing cupboard or under a bath
- Can be mounted horizontally or vertically. When mounted vertically the unit must be positioned so that the outlet is on the top left hand side of the unit
- In line isolating valves are incorporated into the push fit flexible hoses


<b>Finish</b>	
High pressure mixing unit and sirona panel	
<b>Code</b>	SATMIXSIR-HP

Temperature Control	Thermostatic
Inlet Connections	15mm push fit flexible hoses supplied with unit
Water Entry Points	Side exposed
Cable Entry Points	Pre-wired
Outlet Connection	15mm push fit flexible hoses supplied with unit
Plumbing System Compatibility	High pressure only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Open Outlet Flowrate at 1 Bar	9.6l/min
Mains Supply	230V, 50Hz, current 5 amps
Approvals, Complies with	CE, IPX4
Guarantee	5 years



# Satellites LP Mixer Unit

thermostatic mixer shower

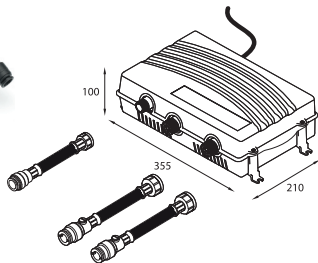

A kit must be purchased with this product



#### IMPORTANT NOTICE

In commercial premises metallic surfaces e.g. metal ceiling panels, metal ducting and metal insulating materials may block wireless transmissions from the remote control panel and prevent correct operation of the shower.

Please contact Triton's special advisory service on 0844 980 0730 for guidance on commercial installations and if necessary make the arrangements for a site survey.

Dimensions given are approximate

Temperature Control	Thermostatic
Inlet Connections	15mm push fit flexible hoses supplied with unit
Water Entry Points	Side external
Cable Entry Points	Pre-wired
Outlet Connection	15mm push fit flexible hoses supplied with unit
Plumbing System Compatibility	Low pressure gravity
Minimum Head Pressure/Flow	100mm
Maximum Head Pressure	10m (1 Bar)
Maximum Static Pressure	10m (1 Bar)
Open Outlet Flowrate at 0.1 Bar	15.3l/min
Mains Supply	230V, 50Hz, current 5 amps
Approvals, Complies with	BEAB, CE, IPX4
Guarantee	5 years

#### Operating Features

- Versatile and easy to install
- Can be installed in a loft space, an airing cupboard or under a bath
- Can be mounted horizontally or vertically. When mounted vertically the unit must be positioned so that the outlet is on the top left hand side of the unit
- In line isolating valves are incorporated into the push fit flexible hoses
- The unit incorporates two pumps therefore removing the need to install a separate twin impeller booster pump

#### Finish

Low pressure mixing unit and sirona panel


Code SATMIXSIR-LP

# Satellites Sirona Control Panel

thermostatic mixer shower



A kit must be purchased with this product

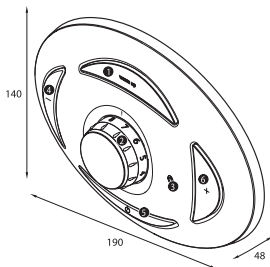

Dimensions given are approximate

## Operating Features

- The sirona control panel can be used with either the lp or hp mixing unit and located upto 10 metres away
- Warm up feature
- Temperature control
- Separate flow increase and decrease buttons
- Simply screws onto the bathroom tiles
- Includes timer, maximum temperature and economy flow settings
- Start/stop button
- Led indicator
- Battery: alkaline 2 x aaa

Dip switch	Low pressure settings	High pressure settings
1 on	Run time set @10 mins	Run time set @10 mins
1 off	Run time set @20 mins	Run time set @20 mins
2 on	Temp range 35-41°C	Temp range 35-41°C
2 off	Temp range 35-47°C	Temp range 35-47°C
3 on	Eco mode set to on	Eco mode set to 'on' if dip 4 set to 'off'
3 off	Full flow control	Full flow control if dip 4 set to 'off'
4 on	Commissioning	Flow set at number 10 (combi flow)
4 off	Normal operation	Normal operation

Approvals, Complies with IPX4

### Finish

High pressure mixing unit and sirona panel


Code SATMIXSIR-HP

Low pressure mixing unit and sirona panel

Code SATMIXSIR-LP

## Satellites Bellona Kit

thermostatic mixer shower

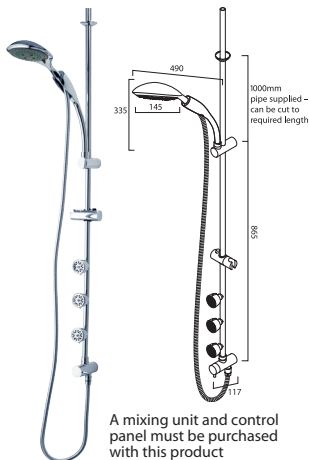

Dimensions given are approximate


### Operating Features

- Diverter control enables user to switch between shower head and body jets, or both
- Rub-clean showerhead – 3 spray pattern
- Rub-clean body jets – 2 spray pattern
- 1.75m hose
- Upper riser rail can be cut to required length, supplied as 1000mm

Finish	Code
Chrome	KITSATBEL

## Satellites Metis Kit

thermostatic mixer shower

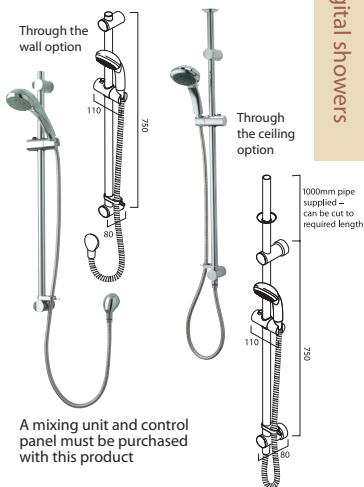

Dimensions given are approximate

### Operating Features

- 700mm and 940mm riser rail supplied that can be cut to required length
- Rub-clean showerhead – 5 spray pattern
- 1.75m hose
- Through the wall or through the ceiling options provided

Finish	Code
Chrome	KITSATMET