


# T300si Wireless

## wireless electric shower

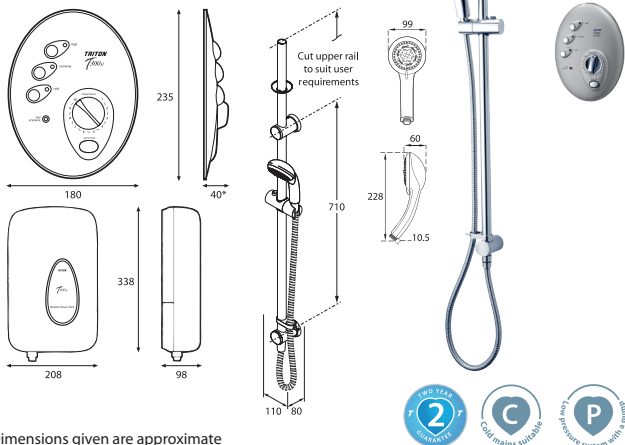

Dimensions given are approximate

### Operating Features

- Wireless technology
- Discrete control panel that operates up to 10m away from power pack
- Through the ceiling riser rail and through the wall bulkhead options provided
- Push button start/stop with phased shutdown
- Push button power selector for cold/economy/high
- Temperature control with numbered dial
- Low pressure indicator
- Rub clean showerhead
  - 5 spray pattern

Finish	Power	Code
Satin/Chrome	9.5 kW	SP309SIWLSA
Satin/Chrome	10.5 kW	SP3010SIWLSA

Temperature Control	Stabilised
Power Ratings	9.5 kW, 10.5 kW
Inlet Connection	15mm compression
Water Entry Points	Back, bottom (right hand side unit)
Cable Entry Points	Back, top (right hand side unit)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min and 1.5 Bar @ 11l/min for 10.5 kW
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, CE, BSI kite mark
Guarantee	2 years