


# T70Z

## electric shower

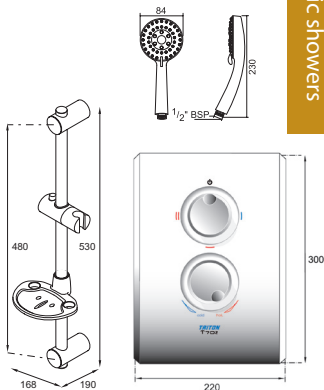

\*Right hand side cable entry is achieved using the Z Uni-fit Kit.

\*\*At running pressure/flow 0.7 Bar at 8 l/min the shower will continue to operate at a reduced performance.

Dimensions given are approximate

Temperature Control	Stabilised
Power Ratings	7.5 kW, 8.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, back (left hand side of unit) Bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (left or right hand side unit*)
Outlet Connection	1/2" BSP
Plumbing System	Cold water only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min**
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with BEAB, CE, BSI Kitemark	
Guarantee	2 years

### Operating Features

- Swiv-let™ – A 180° fully reversible water inlet providing Triton Swivel-fit™ flexibility for new or replacement installations
- Single control for start stop selection
- Separate temperature and power controls
- Temperature protection – switches off the power fully ensuring the temperature does not exceed the safety limit
- Rub clean showerhead – 3 spray pattern

Finish	Power	Code
White/Chrome	7.5 kW	SP7007Z
White/Chrome	8.5 kW	SP7008Z
Z Uni-Fit Kit	–	SPZUFIT