

Omnicare

Thermostatic Electric Shower

Product Codes

Omnicare 8.5kW with 1.5m Hose	TEOMN81
Omnicare 9.5kW with 1.5m Hose	TEOMN91
Omnicare 8.5kW with 2m Hose	TEOMN281
Omnicare 9.5kW with 2m Hose	TEOMN291

Installation

- Multiple pipe and cable entry points, a generous footprint and a fixing hole kit, the Omnicare is designed with ease of replacement in mind
- Suitable for connection with an analogue waste pump

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- SafeSet™ limits the maximum water temperature to 43°C, in line with guidance from our consultants in the OT Service. The unit can alternatively be configured to 41°C, meeting the BEAB Care Standard or a higher maximum temperature
- Tri-Care™ technology keeps the water temperature within +/- 1°C complying with BEAB care approval
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Easy clean 5 spray pattern shower head, with removable faceplate
- Single hand operated handset holder with easy push system



SAFETY CRITICAL
TRITON ACCESSORY



Omnicare

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic +/-1°C with Tri-Care™
Power ratings	8.5kW & 9.5kW (at 240V)
Finish	White
Adjustable max temperature	41°C, 43°C or Max
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	15mm swivel inlet (up/down)
Terminal block	16mm max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	Minimum maintained pressure: 0.5 bar Minimum maintained pressure for BEAB Care: 1.0 bar
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

Riser Rail Kit

Standard version	
Length	680mm
Diameter	20.6mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m or 2m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period


Diagram Key:

Water Entry Points

Cable Entry Points

Dimensions:

H: 387mm
W: 240mm
D: 117mm

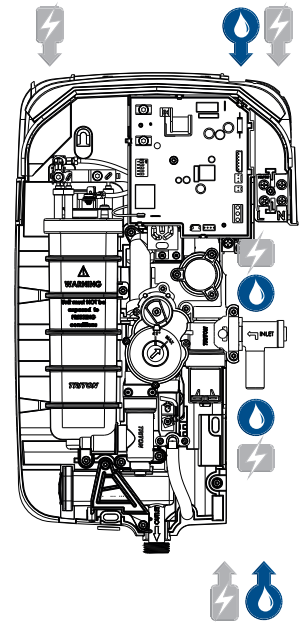

Omnicare Kit
(680mm) White
GAUF1



1.5m Anti-twist Hose - Chrome
REHOSE150C

2m Anti-twist Hose - Chrome
TSHG1266



Inclusive Showerhead
(5 Spray Pattern)
TSHCAREWHT

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers