

Omnicare SR Pumped

Thermostatic Electric Shower

Product Codes

Omnicare SR Pumped 8.5kW (UK)

GEOSRP81

Installation

- Silent running pumped electric shower using new digital brushless motor technology
- Retro-fits previous Safeguard pumped electric model
- 2 year guarantee for peace of mind

Commissioning

- Simple 2 minute commissioning process

End User

- Ease of use - Large push button start/stop with contrasting grey controls for the visually impaired
- Most peaceful showering experience - Quiet Mark quiet pump technology provides a tranquil shower
- Ideal for low pressure areas, the integrated pump boosts the flow rate of your shower
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- Maximum temperature factory set 43°C
- This shower is BEAB Care and RNIB approved for total peace of mind
- Connects to analogue level access waste pumps only
- Includes extended kit for greater adjustability, rub clean 5 spray pattern shower head and a 2m anti-twist hose

Flexible Shower Kit

- Extended riser rail – Longer 940mm riser rail with height adjustable shower head holder
- 2m anti-twist hose ideal for seated and standing showering
- Easy clean inclusive 5 spray pattern showerhead with removable spray plate



Omnicare SR Pumped

Thermostatic Electric Shower

Shower


Temperature Control	Thermostatic Pumped Electric
Power ratings	8.5kW (240v)
Finish	White & Grey
Energy Rating	A
Sound Power Level	56dB
Controls	Start/stop button & temperature control dial
Visual indicators	Power-on
Water connection	15mm compression
Outlet Connection	½" BSP
Terminal block	16mm ² max cable
Water supply	Mains cold water (Tank fed)
Plumbing System	Cold water cistern only (Gravity fed system)
Minimum Head Height	80mm
Maximum Head Height	10m
Maximum Static Pressure	1 bar (static)
Water Entry Points	Top, bottom, back (right hand side of unit)
Cable Entry Points	Top, bottom, back (right hand side of unit)
Water Ingress protection	IP25
Approvals, Complies with	BEAB, BEAB CARE, KIWA, RNIB, UKCA, CE, BSI Kitemark, Quiet Mark

Diagram Key:

- Water Entry Points
- Cable Entry Points

Dimensions:

- H: 300mm
- W: 316mm
- D: 113mm

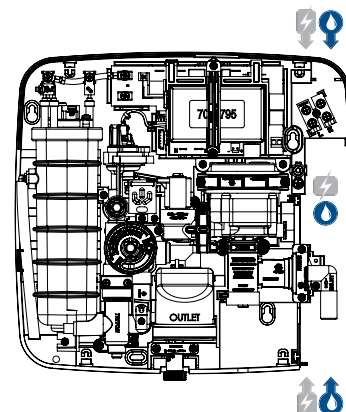

Riser Rail Kit

Extended version

Length	940mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	2m Anti-twist Chrome



Omnicare Extended Kit (940mm) White
GAOMDF1



2m Anti-twist Hose - Chrome
TSHG1266



Inclusive Showerhead (5 Spray Pattern)
TSHECAREWHT

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers