

Omnicare

Thermostatic Electric Shower

Product Codes

Omnicare 8.5kW	TEOMN81
Omnicare 9.5kW	TEOMN91
Omnicare 8.5kW with 2m Hose	TEOMN281
Omnicare 9.5kW with 2m Hose	TEOMN291

Installation

- Multiple pipe and cable entry points, a generous footprint and a fixing hole kit, the Omnicare is designed with ease of replacement in mind
- Suitable for connection with an analogue pump

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Easy to use low resistance centralised temperature control
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Flexible accessories – Comes with extended 680mm riser rail kit with adjustable fixing centres and extended 1.5m anti twist shower hose
- Easy clean inclusive 5 spray pattern showerhead with removable spray plate



SAFETY CRITICAL
TRITON ACCESSORY




Omnicare

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic +/-1°C with Tri-Therm™
Power ratings	8.5kW & 9.5kW (at 240V)
Finish	White
Adjustable max temperature	41°C, 43°C or Max
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	15mm swivel inlet (up/down)
Terminal block	16mm max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	Minimum maintained pressure: 0.5 bar Minimum maintained pressure for BEAB Care: 1.0 bar
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

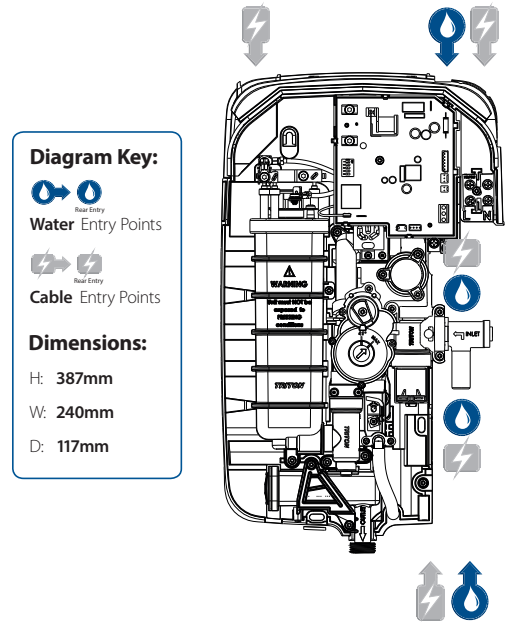

Riser Rail Kit

Standard version

Length	680mm
Diameter	20.6mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period



Omnicare Kit
GAUF1



1.5m Anti-twist Hose - Chrome
REHOSE150C



Inclusive Showerhead
(5 Spray Pattern)
TSHECAREWHT

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
 (2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
 (3) The shower will operate down to 0.5 bar at reduced flow rates.