

Velino TMV2 Cool Touch Diverter

Thermostatic Bar Mixer Shower

Product Codes

Velino Diverter Thermostatic Bar Mixer Shower	RMVELDV2
---	----------

Installation

- 3/4" flat face union (valve to fixings)
- 1/2" BSP male

End User

- TMV2 Thermostatic control maintains consistent, comfortable showering temperature
- Cool touch feature - ensures that the valve remains comfortable to touch
- Integral diverter switches water flow between fixed shower head and 3 spray pattern handset with 1.5m smooth hose
- Automatic shutdown safety feature should either the hot or cold water supplies fail
- Suitable for high pressure systems only
- 5 year parts and labour guarantee




Velino TMV2 Cool Touch Diverter

Thermostatic Bar Mixer Shower

Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	High pressure systems, low pressure with pump
Inlet Fittings	Compression-fit (fixings to pipe)
Inlet Connection	3/4" flat face union (valve to fixings)
Outlet Connection	1/2" BSP male
Minimum Running Pressure	0.5 Bar
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Open Outlet Flow Rate @ 0.5 Bar	4.8 l/min
Approvals, Complies with	WRAS, TMV2 (HP-S)
Guarantee	5 years

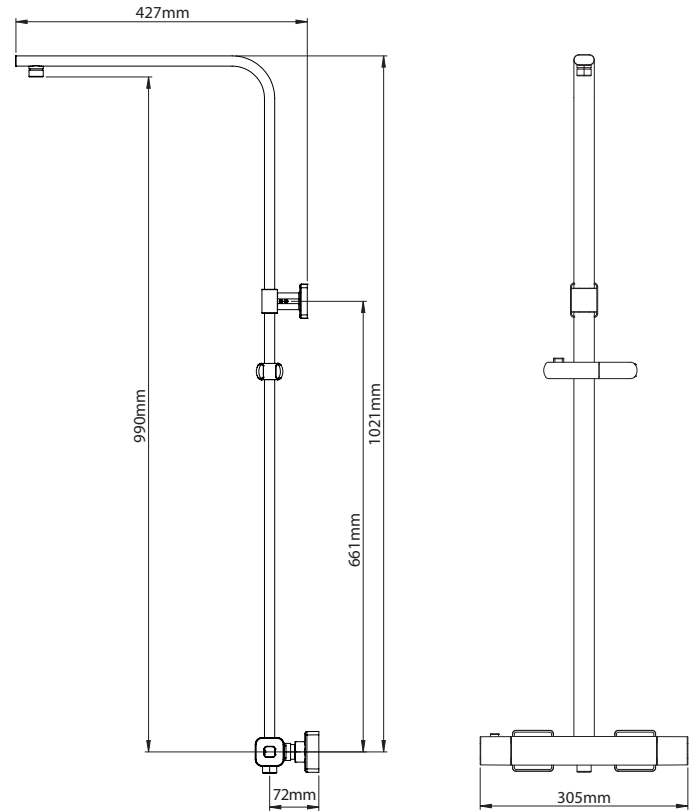

1.5m Smooth Hose - Chrome
TSHM150S



Verity 3 Spray Push Button Shower Head
GAHSVE32

Contact our specification team

Call: 02476 324 776 | **Email:** specification@tritonshowers.co.uk | **Web:** www.tritonshowers.co.uk/specifiers