

# Dene TMV2 Cool Touch Bar Diverter

Thermostatic Mixer Shower

## Product Codes

Dene TMV2 Cool Touch Bar Diverter	UNDETHBMDIV
-----------------------------------	-------------

## Installation

- 15mm push-fit (fixings to pipe) 3/4" flat face union (valve to fixings)
- 1/2" BSP bottom

## End User

- Cool touch technology - ensures that the valve remains cool and comfortable to touch
- Integrated diverter featuring a large diameter fixed shower head and a three-spray pattern handset
- Durable design including ceramic disc flow control
- Suitable for high pressure systems only
- Includes all the fittings, featuring the popular push-fit surface brackets
- Height adjustable riser rail upon fixing ensures ease of installation
- Height adjustable handset - ideal for families
- 5 year parts and labour guarantee




# Dene TMV2 Cool Touch Bar Diverter

Thermostatic Mixer Shower

## Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	High pressure systems, low pressure with pump
Inlet Fittings	Push-fit for pipe tails
Inlet Connection	15mm female push fit
Outlet Connection	1/2" BSP male
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Open Outlet Flow Rate @ 0.2 Bar	3.1 l/min top outlet, 4.2 l/min bottom outlet
Approvals, Complies with	WRAS, TMV2 (Valve Only)
Guarantee	5 years

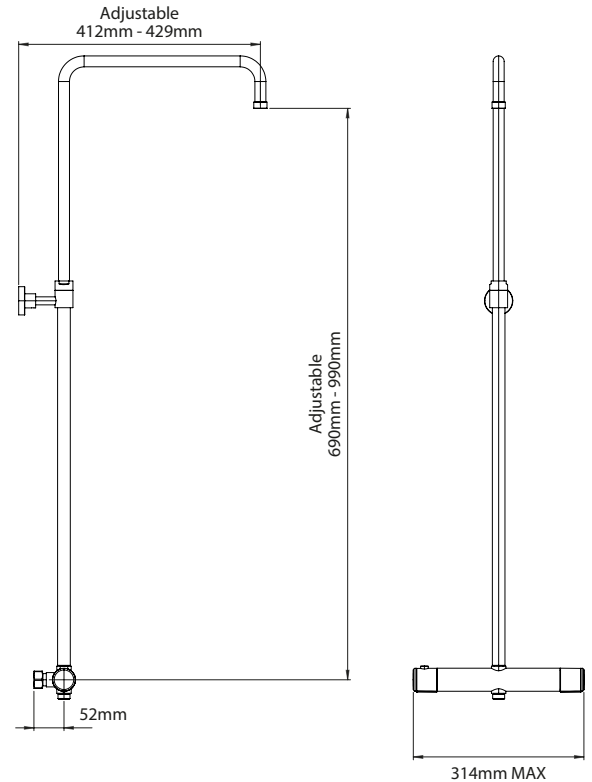

**Isabel Circular Fixed Shower Head - Chrome**  
TSHFISABCH



**1.25m Anti-twist Hose - Chrome**  
TSHG1203



**Lara Multi Spray Shower Head**  
TSHMLAR3POSCH

Contact our specification team

**Call:** 02476 324 776 | **Email:** [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | **Web:** [www.tritonshowers.co.uk/specifiers](http://www.tritonshowers.co.uk/specifiers)